



We are here to help!
TST official website: www.tstebike.com

V 1.8.06



Installation Video



TST GRP LLC APP

Important Notice

Scan the QR code to activate your warranty service and lifetime telephone support.

[Register now](#)




warrantywisdom.com



User Manual

R002/R002 PLUS Electric Bicycle

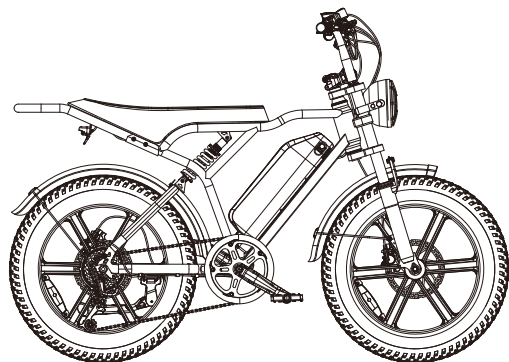

R002/R002 PLUS

Thank you for purchasing TST GRP LLC's R002/R002 PLUS Ebike.

We are so proud to provide you with a quality product that will be enjoyed for many years to come. Before assembling and riding your Ebike, please ensure that you read and understand this manual completely.

TABLE OF CONTENTS

USING THIS MANUAL	01
GENERAL SAFETY	01
CHARGER SAFETY INFORMATION	06
SPECIFICATIONS	09
INSTALLATION INSTRUCTION	10
OPERATION INSTRUCTION	28
USER MAINTENANCE AND SERVICE INSTRUCTIONS	29
TROUBLESHOOTING	34
LIMITED WARRANTY	36

USING THIS MANUAL

This contains information about the product, its equipment, as well as instructions for its operation and maintenance. To ensure safe use and prevent accidents, make sure you read the manual carefully and familiarize yourself with the ebike before using it. There are many warnings and cautions in this manual regarding the safe operation of the machine and the consequences in the event of improper setup, operation, and maintenance. If you have any questions about the information in this manual, you should contact TST GRP LLC immediately.

Notes, warnings, and cautions contained in the manual and the paragraphs marked with the triangle Caution Symbol at the left should be read carefully. Attention should also be paid to the information beginning with NOTICE in this manual.

Keep this manual, along with any other documents you received with your Ebike, for future reference, but the content may change at any time without notice. Visit <https://www.tstebike.com/pages/help-center> to download the latest version. TST GRP LLC makes every effort to ensure the accuracy of its documentation and will not be held liable for any errors or omissions contained therein.

Considering the difficulties of anticipating every situation or condition that may arise when riding, this manual cannot make any guarantees about the safe use of ebikes under all conditions. Risks associated with using any Ebike cannot be predicted or avoided and are solely the responsibility of the rider.

GENERAL SAFETY

INSTRUCTIONS PERTAINING TO RISK OF FIRE or ELECTRIC SHOCK

VITAL SAFETY INSTRUCTIONS

WARNING! Basic precautions should always be followed when using this product, including:

- a. Read the instructions before use.
- b. When the product is used near children, close supervision is necessary to reduce the risk of injury.
- c. Do not put fingers or hands into the product.
- d. Do not use this product if the flexible power cord or output cable is frayed, has cracked insulation, or shows other signs of damage.
- e. The equipment should not be used at temperatures below -4°F (-20°C) or above 149°F (65°C).
- f. The battery should be charged at temperatures between 32°F (0°C) and 86°F (30°C). Do not charge the battery at temperatures outside of this range.

WARNING! It is your responsibility to comply with all traffic laws and to use the proper equipment. This includes wearing the proper clothing and maintaining your Ebike.

Comply with all local ebikes traffic laws and regulations.

Be sure to obey local laws regarding ebikes lighting, ebikes licensing, ebikes path and trail use, helmet laws, child cycling laws, and special ebikes traffic laws. It is your responsibility to know and obey your local laws.

- Always wear a properly fitted helmet that covers your forehead when riding an Ebike. Specific safety devices are required in many locations. You are responsible for familiarizing yourself with the local laws, rules, and regulations where you ride, including equipping yourself and your Ebike accordingly.
- A rider's weight and luggage should not exceed 450lbs/204kg unless otherwise stated.
- Before you ride your Ebike, always check to make sure everything is working properly and correctly aligned.
- Become familiar with your ebike's controls, such as brakes, pedals, shifting, etc.
- When pedaling, keep all body parts and obtrusive objects clear of the sharp chain rings. Wear proper clothing to prevent injury.
- While riding, remember you are sharing the road or path with others. i.e. motorists, pedestrians and other cyclists.
- Always ride defensively. Assume others don't see you and expect the unexpected.
- Always be aware of your surroundings. Be alert and responsive to:

- 1) Motor vehicles of all kinds and from all directions.
- 2) Unexpected movements of obstacles.
- 3) Nearby pedestrians.
- 4) Children and animals in the area.
- 5) Imperfections on Ebike paths or paved roads such as potholes, uneven surfaces, loose gravel construction, and debris.
- 6) Warnings, hazards, and yield signs.

- Make use of designated Ebike lanes when available, and ride traffic-directed.
- Always stop at stop signs and traffic lights.
- Before continuing on, look both ways at street intersections after coming to a complete stop.
- Use official hand signals when turning or stopping.
- Do not wear headphones while riding.
- Don't hold onto another vehicle.
- Avoid weaving through traffic or making sudden movements or turns.
- Cyclists are subject to the same right-of-way rules as motorists. A bicyclist should always be prepared to yield.
- Never ride under the influence of alcohol or drugs.
- Avoid riding in bad weather when visibility is obscured, for example, at dawn, dusk, or at night. Such conditions increase the risk of an accident.

Wet Weather

It is recommended to not ride in wet weather if avoidable. Ride in wet weather only if necessary.

Using an Ebike in heavy rain or in streams is not recommended. Do not immerse or submerge this product in water or liquid as the electrical system could be damaged.

- Use this ebike with caution in wet weather.
- Decrease your speed in slippery conditions to help you control the Ebike.
- It takes longer to slow down and come to a stop in wet conditions than in dry conditions.
- Make sure you are visible to others on the road. Wear reflective clothes and use approved safety lights.
- In the rain, road hazards are harder to see; take caution.

NIGHT RIDING

When riding at night, cyclists should exercise extra caution. Night riding can be more dangerous than riding in the daylight for bicyclists because motorists and pedestrians have a difficult time seeing them.

Those who are aware of the increased risks should take extra precaution when riding at dusk, at night, or when drawing. It is important to wear appropriate gear and use specialized equipment when riding in unfavorable conditions to reduce the risk of injury.

Warning! Do not rely on reflectors as a substitute for illumination. If the necessary lights and reflective gear aren't used, cyclists are virtually invisible to other cyclists and motorists. Be sure to use reflectors and lights to make yourself visible if you're riding at night. Insufficient lighting can lead to serious injury or death. As a moving cyclist, reflectors are designed to reflect off of car and street lights to help you become more visible and recognizable when riding.

Caution! Regularly inspect the reflectors and mounting brackets of your reflectors to ensure they are straight, secure, and clean. Make sure you comply with all local laws regarding night riding. The following are recommended.

- Wear light-colored, reflective clothing and accessories to enhance your visibility. There are plenty of suitable reflective clothing options available: Vests, armbands, leg bands, stripes on your helmet, and blinker attached to your body and or ebikes.
- Make sure that your clothing or miscellaneous items do not obstruct your reflectors and lights
- Make sure that your ebikes is equipped with reflectors for riding at dawn, dusk or at night.
- Always ride slowly when riding at night.

Assembly and Fit

It is essential that your Ebike is assembled and fitted correctly in order to ensure your safety, performance, and comfort. Even if you have the experience, skills, and tools to complete these essential steps before your first ride, TST GRP LLC recommends having a certified, reputable Ebike mechanic check your work.

NOTICE: In case you do not have the necessary experience, skill, or tools to complete assembly and fit, TST GRP LLC strongly recommends that you have a certified, reputable Ebike mechanic complete these procedures as well as any subsequent adjustments or tuning.

NOTICE: During the assembling process, it is critical to secure the front wheel and check the tightness of the axle nuts on the rear wheel. TST GRP LLC ebikes have quick release front wheel mounting mechanisms and bolt-on rear wheels. These mechanisms can become loose or unsecured during shipping or over time. Inspect the torque and security of all wheel mounting hardware upon arrival and periodically thereafter. Both wheels need to be properly secured before operating your Ebike.

Mandatory Equipment and Use Locations

Make sure you have all of the required and recommended safety equipment and follow all laws regarding the use of an ebike in your area before riding. For example, these laws may specify the need for mandatory equipment, use of hand signals, and where you can ride.

Replacing Components or Attaching Accessories

By using parts or components that are not original, you can jeopardize the safety of your Ebike, void your warranty, and in some cases, make your Ebike in violation of the law.



You are solely responsible for the replacement of original components or the installation of third-party accessories not specifically recommended for your Ebike model by TST GRP LLC. It may void your warranty, create an unsafe riding condition, cause damage to property or your Ebike by TST GRP LLC, or result in serious injury or death if you use aftermarket accessories or components that have not been tested for safety and compatibility by TST GRP LLC.

Safety Check Before Each Ride

Check the condition of your Ebike before riding it, in addition to having regular maintenance performed on it. You should consult a certified, reputable Ebike mechanic if you are unsure how to conduct a comprehensive check before every ride.

Electrical System

Your ebike's electrical system powers several components that control different operating conditions and user preferences. It is critical that you become familiar with all aspects of your ebike's electrical system and make sure it is working before each ride. The front and rear brake levers contain power cutoff switches that disable the hub motor's assistance when applied, and both should be checked for proper operation. Applying the throttle gradually should provide smooth acceleration. If your throttle, brake lever cutoff switches, pedal assistance, or lighting are malfunctioning, intermittently, or not working properly, please stop using your ebike and contact TST GRP LLC Support.

Brakes

Ensure that the brakes and their system components are free from damage and are working properly. The front and rear brake levers should not touch the handlebar when fully squeezed. If you notice a problem with your Ebike's brakes, have them repaired by a certified, reputable Ebike mechanic.

Tires and Wheels

If your wheels wobble side to side or up and down when you spin them, they must be repaired or replaced. If your wheels become untrue or your spokes loosen due to normal use, we recommend that you have a certified, reputable Ebike mechanic perform wheel tuning and truing operations on your Ebike. Unless you have adequate knowledge, tools, and experience, do not attempt to true wheels or tighten spokes. Ensure that the tires and inner tubes are in good working condition and have the proper air pressure. Always replace tires and inner tubes with punctures, cuts, or damage before riding. Incorrectly inflated tires can decrease performance, increase tire and component wear, and make riding your Ebike unsafe.

Accessories, Straps, and Hardware

Make sure all hardware and approved accessories are properly attached according to instructions provided by the component manufacturer. It is a good idea to check overall hardware, straps, and accessories before each ride. If you discover anything amiss or something you're not sure about, have it checked by a certified, reputable Ebike mechanic.

Handlebar, Grips, and Seat Adjustments

Make sure the handlebars and handlebar stem are aligned properly, fitted to the user, and torqued to their recommended values. Make sure the handlebar grips are not loose on the handlebar end. If your handlebar grips are loose, worn, or damaged, you should replace them before you ride. Before riding, the seat and seat post should be properly aligned, fitted to the user, and the seat post quick release should be properly tightened, closed, and secured.

Battery Charged, Secured, and Unplugged

Make sure the battery is adequately charged and operating properly. Before you ride, ensure the battery charger is unplugged from the outlet, and the battery is stored in a safe place. The battery must be locked securely to the frame battery mount before you ride. If the battery is removed, don't operate the electrical system. Make sure you push hard enough when installing the battery into the frame, and hear the "CLICK" sound.

CHARGER SAFETY INFORMATION

- You should only use the charger indoors, in a cool, dry, ventilated area, on a flat, stable, hard surface.
- Avoid contacting the charger with liquids, dirt, or metal objects. Do not cover the charger while it is in use.
- Place the charger in a safe place away from children.
- A fully charged battery can help extend the life of the battery and reduce the chance of over discharging.
- The battery should not be charged with any charger other than the one originally supplied by TST GRP LLC Bikes or a charger designed specifically for your Ebike, purchased directly from TST GRP LLC Bikes.
- This charger works on 110/240V 50/60 Hz standard home AC outlets and automatically detects and accounts for incoming voltage. It should not be opened or modified in any way.
- The cables should not be pulled or yanked. Carefully unplug both the AC and DC cables by pulling on the plastic plugs directly, and not on the cables themselves.
- The charger is expected to get relatively warmer as it is charged. If the charger becomes too hot to hold, if you smell a strange odor, or if you notice any other indicator of overheating, stop using the charger and contact TST GRP LLC Support.



Charge the battery only with the charger originally supplied with the Ebike from TST GRP LLC Bikes, or a charger purchased directly from TST GRP LLC Bikes, designed for use with your specific Ebike serial number, as approved by TST GRP LLC Bikes. Never use an aftermarket charger, which can result in damage, serious injury, or death.



Please follow the instructions and safety information in this manual carefully when charging your Ebike from TST GRP LLC Bikes. A failure to follow proper charging procedures may cause damage to your Ebike, the charger, or personal property, or even result in serious injury or death.



To ensure safety, please use our chargers. We cannot be held responsible for any issues or consequences arising from the use of chargers that are not authorized by us.

General Operating Rules

NOTICE: Before you use your Ebike from TST GRP LLC, make sure you pay attention to all the general operating rules below.

- Be sure to obey the same road laws as all other road vehicles in your area.
- To learn more about traffic/vehicle laws in your area, contact the local road traffic authority.
- Ride predictably, in a straight line, and according to traffic flow. Never ride against traffic.
- Use the correct hand signals when turning.
- Ride defensively; you may be hard to see to other drivers.
- Concentrate on the road ahead. Avoid potholes, gravel, wet or oily roads, wet leaves, curbs, train tracks, speed bumps, drain gates, thorns, broken glass, and other obstacles, hazards, and puncture flat risks.
- Cross train tracks at 90-degree angles or walk your Ebike across.

- Expect the unexpected, such as opening car doors or backing out of driveways.
- Be careful at intersections and when passing other vehicles or cyclists.
- Get to know the features and operation of TST GRP LLC ebike. Practice and become proficient at shifting gears, applying the brakes, using the pedal assist system, and using the throttle in a controlled setting before riding in riskier conditions.
- Wear proper riding apparel and close-toed footwear. If you are wearing loose pants, use leg clips or elastic bands to prevent them from getting caught in the gears or chain. Do not use items that may restrict your hearing.
- Be sure to check your local rules and regulations before carrying cargo.
- When braking, use the rear brake first, then the front brake. When brakes are not applied correctly, they may lock up and lead to you losing control and/or falling.
- Keep a comfortable distance from other objects, riders, and vehicles. Safe braking distances are based on factors such as road surface and light conditions among other variable.

Safety Notes

Listed below are safety notes to help you operate your TST GRP LLC Ebike safely. Please review them carefully. Failure to review these notes can lead to serious injury or death.

- Users must read and understand this manual before riding an TST GRP LLC Ebike. There may also be manuals for components on the Ebike, which should be read before installation or use using those components.
- Make sure you understand all instructions and safety warnings.
- Before you start riding, make sure the Ebike fits you properly. Too large or too small an Ebike may cause you to lose control or fall.
- Wear an approved ebike helmet whenever you ride an Ebike and follow all instructions from the helmet manufacturer regarding fit and care of your helmet. Failure to wear a helmet when riding may result in serious injury or death.
- Check your Ebike's setup, tightening, and torque to recommended torque values before you use it, and regularly check the condition and tightness of components and hardware.
- In the area(s) in which you ride, it is your responsibility to familiarize yourself with the laws and requirements of operating this product.
- Ensure the handlebar grips are in good condition and properly installed. Loose or damaged grips can cause you to lose control and fall.
- This product must not be used with standard Ebike trailers, stands, vehicle racks, or accessories that TST GRP LLC has not tested for safety and compatibility and has not verified as safe or compatible.
- In addition to requiring special skills, off-road riding has a variety of conditions and hazards. Wear appropriate safety gear and do not ride alone in remote areas. Check local rules and regulations about whether off-road ebike riding is allowed.
- DO NOT ENGAGE IN EXTREME RIDING. This includes, but is not limited to, jumps, stunts, and any kind of riding that is beyond your capabilities. Although many articles/advertisements/catalogs depict extreme riding, this is not recommended nor permitted, and you can be seriously injured or killed if you perform extreme riding.
- There are limitations to the strength and integrity of ebike and Ebike parts, and extreme riding, such as but not limited to jumps, stunts, etc. can cause damage to Ebike

components and/or cause or lead to dangerous riding situations, in which you may be seriously injured or killed.

- A failure to perform and verify proper installation of a component or accessory, its compatibility, its operation, or its maintenance can result in serious injury or death.
- You must consider your Ebike unsafe to ride until you consult a certified, reputable Ebike mechanic for a thorough inspection of all components, functions, and operations.
- You may void your warranty if you fail to charge, store, or use your battery correctly.
- Each time you ride, you should make sure the brake motor cutoff switches are working properly. The brake system is equipped with an inhibitor that cuts off power to the electric motor whenever the brakes are squeezed. Check proper operation of brake motor cutoff switches before riding.
- The pedal assistance sensor and throttle on this product should be used with extreme caution. Ensure you understand and are prepared for the pedal assistance to engage as soon as pedaling is underway.
- The user must understand how the throttle and pedal assistance work before using the Ebike and must travel at a speed appropriate for the usage area, riding conditions, and user experience level. Always use the lowest assist level until you are comfortable with the Ebike and feel confident in controlling the power.
- Any aftermarket changes to your Ebike from TST GRP LLC Bikes not expressly approved by TST GRP LLC Bikes could void the warranty and create an unsafe riding experience.
- The fact that ebike are heavier and faster than regular ebike requires extra caution and care while riding.
- When riding in wet conditions, you should slow down and increase braking distances. Feet or hands can slip in wet conditions and lead to serious injury or death.
- Do not remove reflectors.

General Warnings

Bicycling, like any sport, carries risk of damage, injury, and death. As you choose to ride an Ebike, you assume that risk, so you need to know, and practice, the rules of safe and responsible riding as well as how to use and maintain the Ebike properly. The proper use and maintenance of your Ebike reduces the risk of damage, injury, and death.

Do not combine biking with controlled substances. Never operate an Ebike while under the influence of alcohol, drugs, or any substance that could impair motor functions, judgment, or your ability to handle an Ebike or other vehicle safely.

R002/R002 PLUS is designed for use by persons aged 18 and older. In order to ride safely, riders must have the physical condition, reaction time, and metal capability to manage traffic, road conditions, and sudden situations, as well as respect the laws governing the use of ebike in the location they ride, no matter how old they are. Consult your physician before riding any ebike if you suffer from an impairment or disability such as a visual impairment, hearing impairment, physical impairment, cognitive impairment or seizure disorder.

A Note for Parents and Guardians

You are responsible for the activities and safety of your child as a parent or guardian. Children under the age of 18 should not use R002/R002 PLUS. If you are transporting a child in a child safety seat, they should also be wearing a properly fitted and approved helmet.

WARNING! TST GRP LLC is not responsible for accidents, injuries, or product failures caused by unauthorized modifications or tampering with any part of the original specification.


SAVE THESE INSTRUCTIONS

SPECIFICATIONS

Model Name	R002	R002 PLUS
Max.load Capacity	450 lbs / 204 kg	450 lbs / 204 kg
Max.Speed	Up to 28 MPH on Throttle	Up to 28 MPH on Throttle
Motor	750 W	750 W
Battery	48 V 15AH (720 Wh)	48 V 25Ah (1200 Wh)
Wheel Size	20*4"	20*4"
Tire Pressure	Max 20 PSI	Max 20 PSI
Light	Front/Rear	Front/Rear
Charger	54.6V 2.0A	54.6V 3.0A
Charging Time	7 Hours	7.5 Hours
Water Resistance	IPX5	IPX5
Weight	78.71 lbs / 35.7 kg	80 lbs / 36.3 kg


* Range Per Charge is measured under the conditions that power is sunt, with a 75kg load, at 86°F(30°C), 70% humidity, on a level road, in pure electric riding mode. The results may vary depending on the temperature, load, wind speed, road conditions, and other factors.

INSTALLATION INSTRUCTION

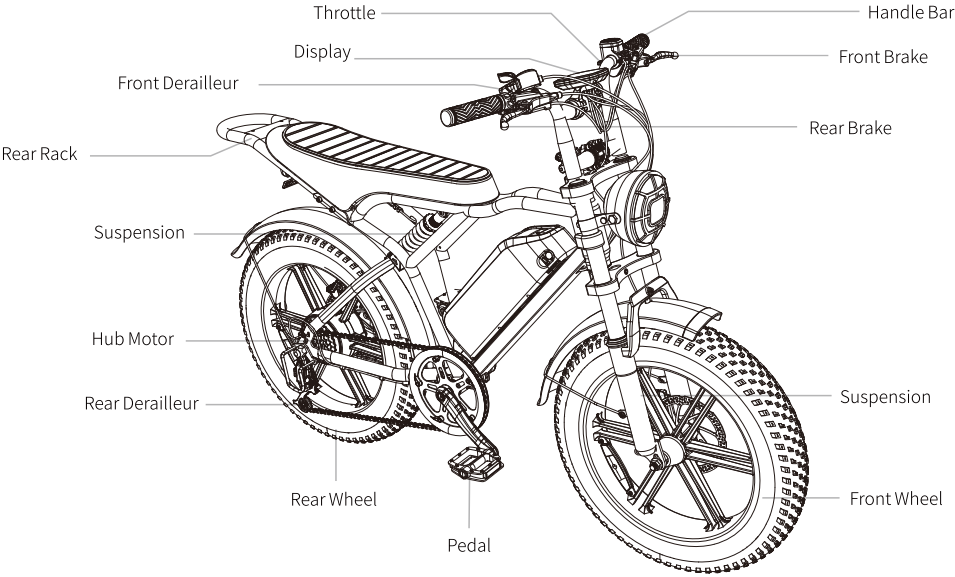

WHAT' S IN THE BOX

- 1* Charger
- 1* Charger cable
- 1* Screwdriver
- 4* Hex keys 3/4/5/6mm
- 3* Wrenches 8-10 13-15 14-17
- 1* Owner's manual
- 1* Left pedal
- 1* Right pedal
- 1* Rear Rack
- 1* Rear Derailleur Guard Rack Protector
- 1*T-socket wrench
- 1*Spare screw (bag)



Note: The following steps are only intended to assist you in assembling your ebike; they are not intended to be a complete or comprehensive guide to assembly, maintenance, and repair. If you need assistance with assembly, repair, and maintenance of your ebike, contact a reputable, certified Ebike mechanic.


Step 1. Unpack the Ebike.

Open the box, take the front wheel out. Remove the R002/R002 PLUS from the Ebike box with another person's assistance who is capable of lifting a heavy object safely. Remove the packaging material protecting the Ebike frame and components. Please recycle packaging materials especially cardboard and foam whenever possible. Take out the kickstand, a small box of charger, and the big box of tools.


Step 2. Remove the entire package foam and ribbon. (Be gentle if you use scissors)

Step 3. Install the kickstand.


- 1- Use a 5mm hex key to remove the two screws on the kickstand.
- 2- Put the kickstand from the back of the frame, align it with the screw holes on the frame, pre-lock the screws and tighten the screws with a 5mm hex key. (Notes: Keep the motor cable above the part of the kickstand attached onto the frame.)
- 3- Put down the kickstand to stabilize the Ebike.

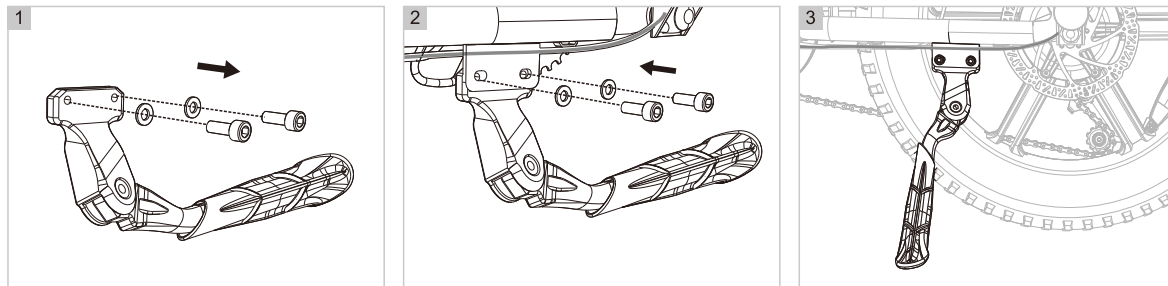


Step 4. Install the front wheel.

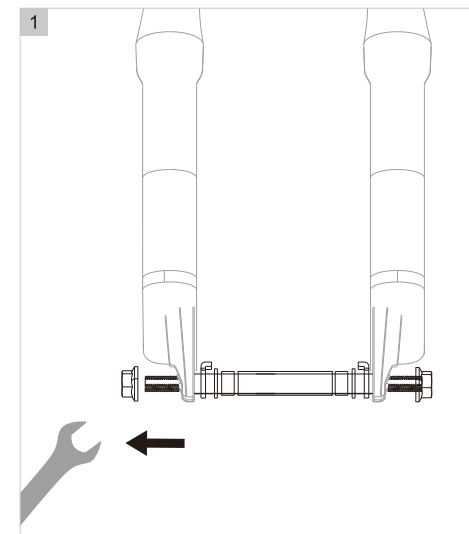

- 1- Use a 15mm wrench to loosen the screws on both sides and remove the front fork axle.
Note: The accessories on the front fork axle are required for front wheel installation!

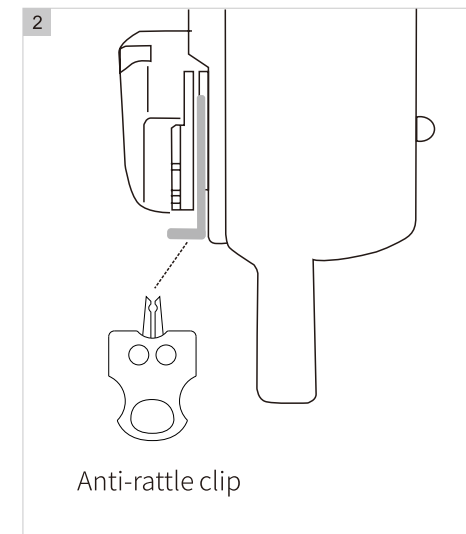


- 2- Remove the anti-rattle clip from the brake caliper.
Note: This is packaging material and may be discarded.

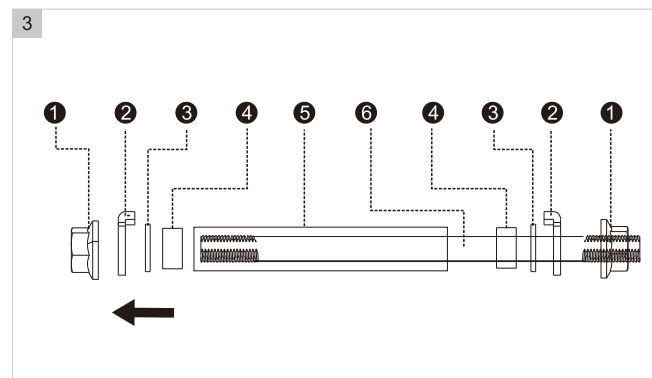


3- Unscrew one side screw, then remove the 2 safety hook, 3 flat washer, and 4 sleeve washer.

Note: Remove the 5 long sleeve (This long casing is packaging material and may be discarded).

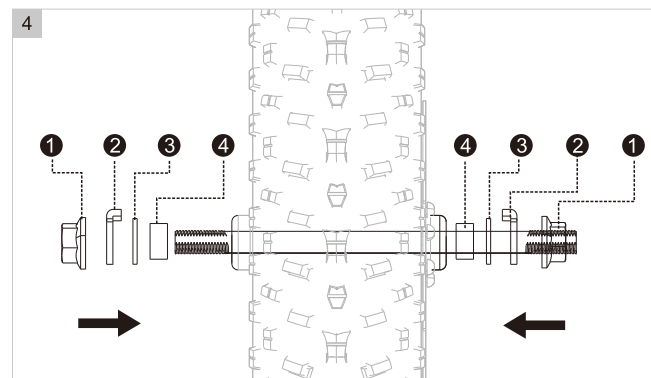


4- Insert the 6 front fork axle into the front wheel hub, then sequentially install the 4 sleeve washer, 3 flat washer, and 2 safety hook. Tighten the 1 screw.

Note: For safety reasons, strictly follow this installation sequence.


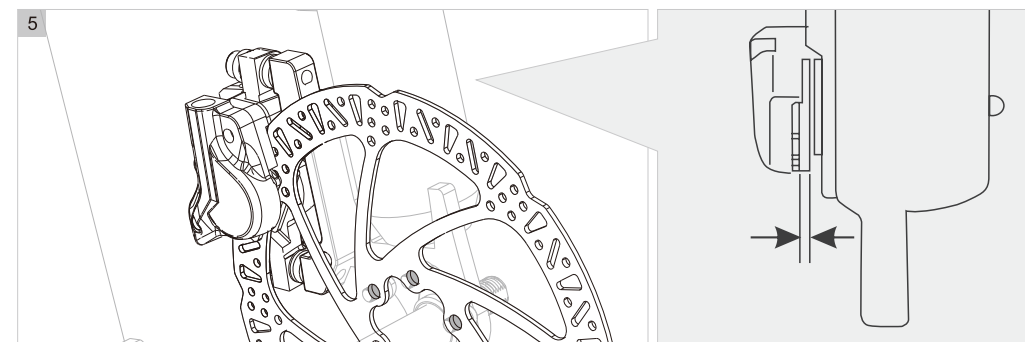


5- Pay attention to the gap in the center of the disc brake rotor layout.

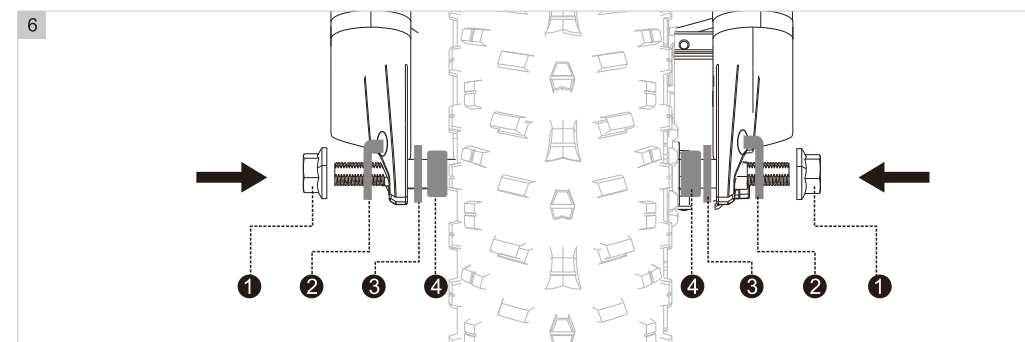


6- Mount the front wheel onto the front fork.

⚠ Note: Ensure the forks are properly aligned in sequence, with the 4 sleeve washer and 3 flat washer positioned inside the fork.

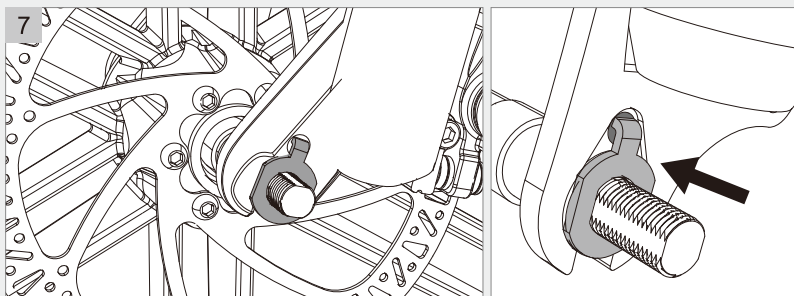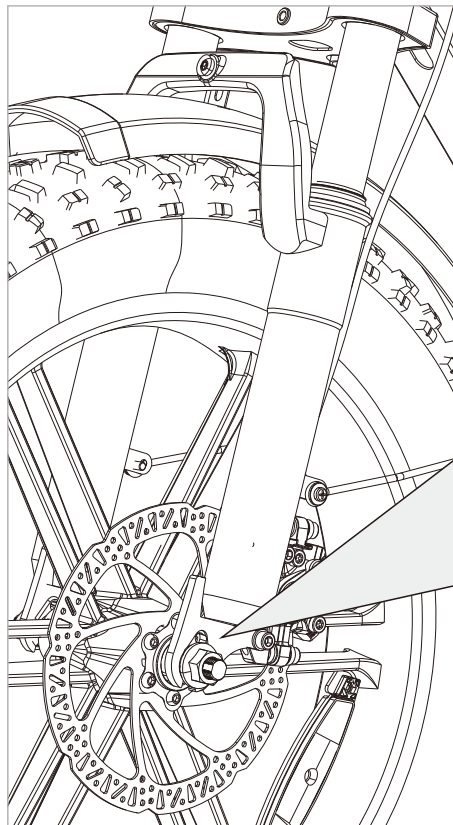

7- Engage the safety hook onto the front fork.

⚠ The safety hook must be secured into the fork's mounting hole.

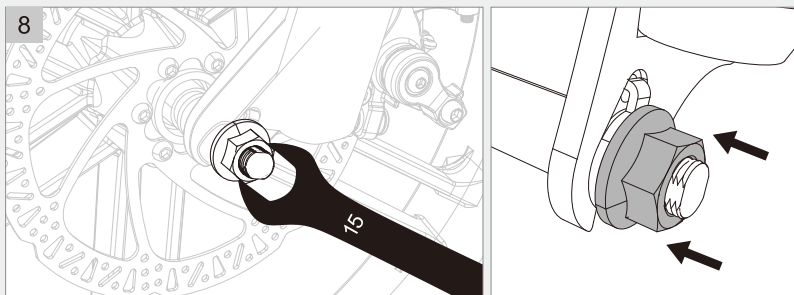



8- Use a 15mm wrench to tighten the screws on both sides.

After tightening the screw, make sure the shaft protrudes slightly on both sides, as illustrated.

Step 5: Install the front fender.


1- Use the 4mm hex key to unscrew the three screws on the front fork.

2- Put the fender in from behind the wheel, tighten the upper screws with a 4mm hex key, and then lock the screws on both sides of the support.

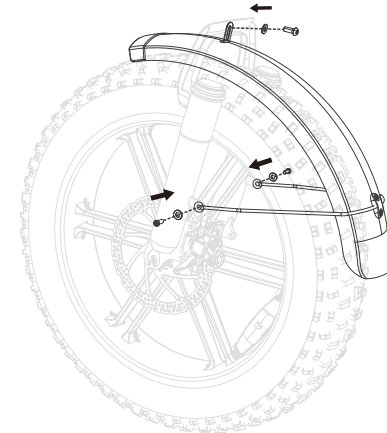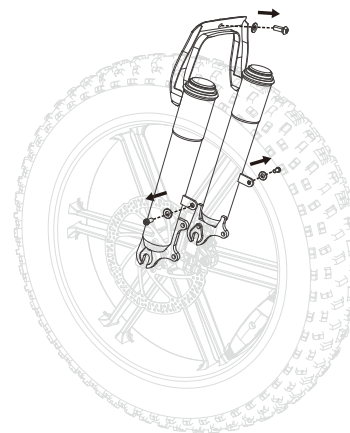


Step 6: Install the handlebar.

- 1- Remove the aluminum top screw with a 5mm allen wrench, loosen the riser screw and remove the riser.
- 2- Flip the riser 180° and lock the aluminum top screw; pre-lock the riser screws without locking them first.
- 3- Use 4mm Allen wrench, take down the riser screws.
- 4- Put on the handlebar, pressure block, the knurling on the handlebar should be placed in the center, diagonal locking screws.
- 5- After the handlebar is installed then adjust the angle of the handlebar, fix the front wheel and turn the handlebar so that the handlebar is perpendicular to the front wheel.
- 6- Lock the riser screws with a 5mm allen wrench; after adjusting the angle of the brakes, lock the screws on the left and right brakes with a 5mm allen wrench.
- 7- After adjusting the angle of the buttons and gauges, use a 3mm Allen wrench to lock the screws on the buttons and gauges.
- 8- After adjusting the angle of the shifter, use a Phillips screwdriver to lock the screws on the shifter.

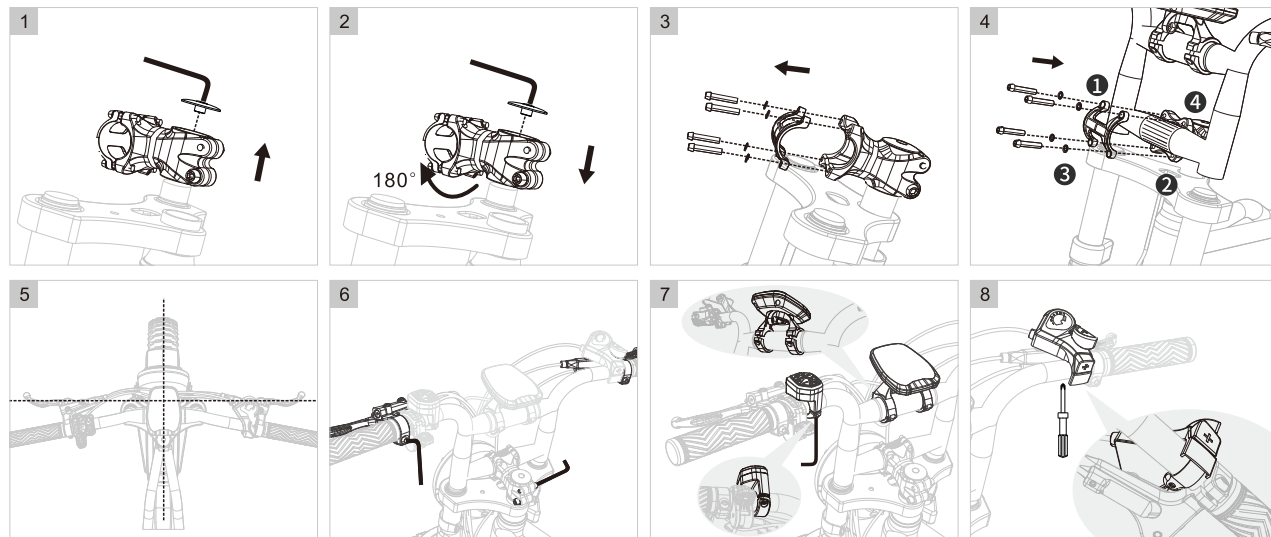**Step 7: Install the front light.**

- 1- Use a 14mm wrench to remove the screws and foam pads from both sides of the front light.
- 2- Open the two brackets on the front light.
- 3- Place the front light with the foam pads between the brackets and the light, then tighten the screws.
- 4- Connect the front light connector: align the red connector on the front light with the red connector on the display marked with an arrow, and push them together firmly.

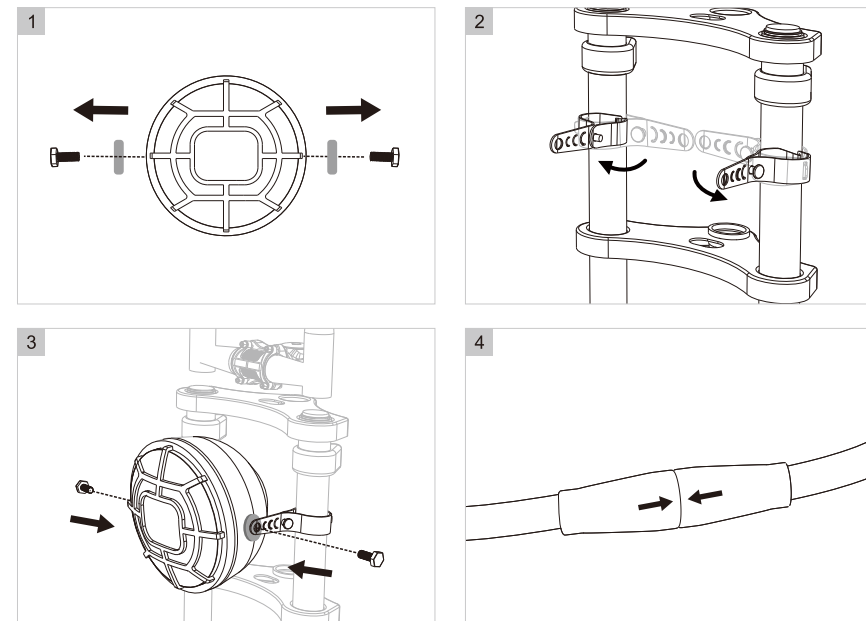


Step 8: Install the pedals.

Note: The "R" on the inside of the pedal shaft is for the right pedal, while the "L" is for the left pedal.

The pedal with the letter "R" is mounted on the right side and locked clockwise with a 15mm wrench.

The pedal marked with "L" is mounted on the left side and locked counterclockwise with a 15mm wrench.

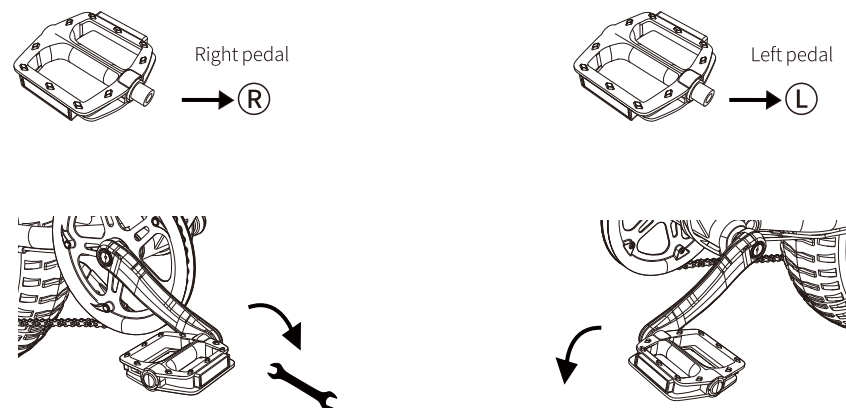
**Step 9: Install Rear Seat Cushion**

1- Remove the screws of the rear saddle bracket.

2- Put the rear rack on the frame slot, put through the screws (Note: put one spacer on each side), then use 5mm hex key and 10mm wrench to tighten the screws.

3- Connect the taillight connector: align the blue connector on the taillight with the blue connector on the frame.


4- Remove the nut from the saddle, place the saddle on the frame, align the mounting tabs and tighten the screws with a socket tool.

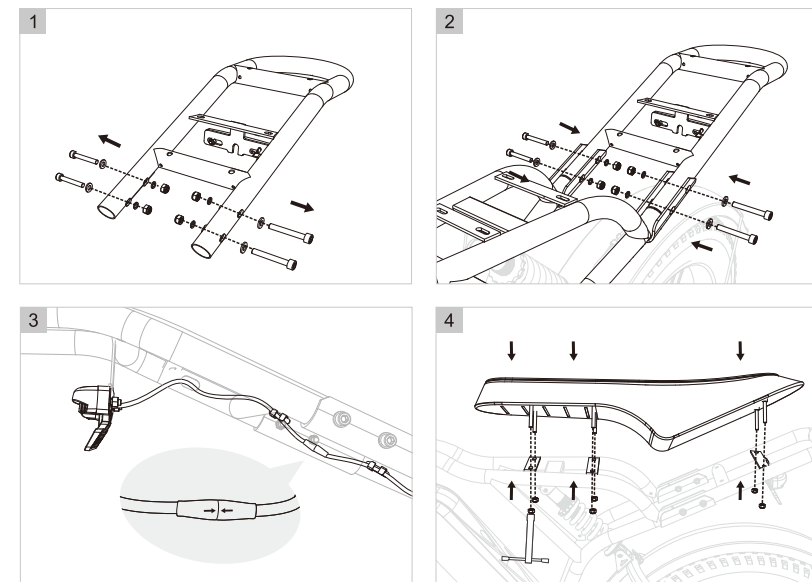


Step 10: Charging port usage demonstration.

Open the dust-proof plug, insert the DC head of the adapter into the charging port.

After use, pull out the adapter and put back the dust-proof plug.



Battery switch: Turning it on powers up the vehicle.







Step 11: Battery lock usage demonstration.

Remove the battery:

1-2: Turn the key counterclockwise; push the battery upward to remove it.

Install the battery:


3-4: Align the battery with the base; turn the key clockwise, then remove the key to lock the battery in place.



Step 12: Install the derailleur guard.


We completely recommend going to an ebike shop and asking an ebike expert to install the derailleur guard for you.

WARNING: Any small mistake can cause serious damage to your motor. An improperly secured motor can cause loss of control, accidents, serious injury, or death.

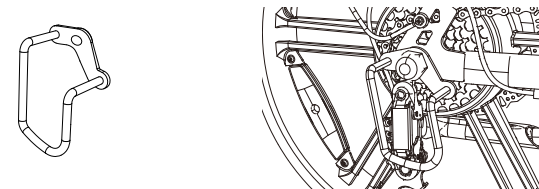

Step 13: Inflate the tires.

Ensure that the tires and tire beads are evenly seated on the rims. Set the tire pressure to MAX 20 PSI with a pump equipped with a A/V valve and a pressure gauge. DO NOT over inflate or under inflate tires.

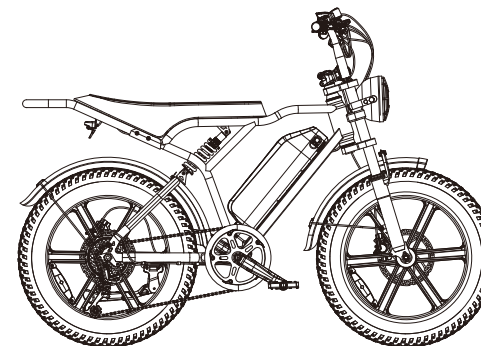

Maintenance Of Brakes

1. Disc brakes are easily affected by oil, please do not use any lubricants on or near disc brake discs, pads and calipers.
2. The running-in of the disc and the pads requires 20 to 40 braking times. After the running-in is complete, the braking force will be significantly enhanced.
3. When the thickness of the pads is less than 3mm or worn to the edge of the warning groove of the caliper, replace it at once.
4. When the pads are newly installed, the mouth of the caliper should be wiped clean.

Notes: If you want to change your brake pads or add brake fluid, please go to a nearby ebikes store and let an experienced mechanic help you.

Battery Charging

Charging Procedure

Here are the steps to charging your Ebike from TST GRP LLC Bikes:

1. **Make sure the battery is off.**
2. **Remove the rubber cover from the charging port.**
3. **Plug the charger into the battery's charging port, BEFORE PLUGGING CHARGER INTO POWER OUTLET.** Whether the battery is on or off the Ebike, place the charger on a flat, stable surface, and connect the DC output plug from the charger (round barrel connector) to the charging port on the side of the battery.
4. **Plug the charger into an electrical outlet.** Connect the charger input plug (110/240-volt plug) to the power outlet. During charging, the LED charge status light on the charger will illuminate solid red, indicating that charging has begun.
5. **Disconnect the charger from the outlet, then the charging port.** When the charger has fully charged, indicated by one charging indicator light turning solid green , unplug the charger from the wall outlet first, then remove the charger output plug from the battery charging port.
6. **Battery indicator light: Red: 0%-10%. Green: 90%-100%.**

Charge your battery at temperatures between 32°F - 86°F (0°C - 30°C) and ensure the battery and charger are not damaged before charging. Please contact TST GRP LLC Bikes Product Support for assistance if you notice anything unusual while charging.

Battery Charging Information

- Before each charge, check the charger, charger cables, and battery for damage.
- Ensure that you charge it in a place where it is clear and safe from potential damage or tripping hazards. Always charge indoors in a cool and dry place away from direct sunlight, dirt, or debris. Always charge your battery in temperatures between 32°F - 86°F (0°C - 30°C) .
- The battery can be charged on or off the Ebike. Turn the key to the unlocked position, and remove the battery.
- You should recharge the battery after every use so that it is ready to go for the next ride. There is no memory effect, so charging the battery after short rides will not damage it.
- Charging the battery normally takes 7 hours.
- The charge indicator light will turn red during charging. After charging is complete, the light will turn green. Make sure the light is facing upward when charging.
- After the green light indicates a complete charge, remove the charger from the battery within one hour. It is designed to automatically stop charging the battery after it has been fully charged, but unnecessary wear of the charging components may occur if the charger is left connected to the battery and a power source for more than 12 hours.
- You should never charge a battery for more than 12 hours at a time.
- DO NOT leave a charging battery unattended.
- For turning on the Ebike: Hold the button circled for around 2 seconds next to the display to turn on the Ebike.
- For turning off the Ebike: Hold the button circled for around 2 seconds next to the display to turn off the Ebike.

REMOVING THE BATTERY

- Turn the key to the unlocked position.
- Turn the knob above the battery anticlockwise to remove the battery from the tray.
- DO NOT touch or damage the “+” and “-” terminal contacts on the top of the battery and keep them clear of debris.

WHEN INSTALLING THE BATTERY ONTO THE Ebike

- DO NOT force the battery into the tray; slowly align and gently push the battery down into the tray. Ascertain that there is no gap between the battery and the tray, and that the battery is fully secured on the tray.
- Turn the key to the locked position.
- Make sure the battery is properly secured to the Ebike before each use by pulling outward on the battery with both hands after it has been locked.

LONG-TERM BATTERY STORAGE

- Follow the instructions below to maintain the health and longevity of your battery when you store your Ebike from TST GRP LLC Bikes for more than two weeks at a time. Charge (or discharge) the battery to approximately 75%.
- Do not leave the battery attached to the frame. Remove it from the Ebike during long-term storage.
- Store the battery between 32 - 86 °F (0 - 30 °C) in a dry, climate-controlled location indoors. Every month, check the battery and if necessary, charge it to 75% with the TST GRP LLC Ebike Charger.



Please follow the above instructions for storing your Ebike and battery from TST GRP LLC Bikes. Failure to follow proper battery storage procedures can result in a non-functional battery. A replacement will not be covered under warranty.




Please discontinue use and charging if the battery is damaged, non-functional, performing abnormally, or has been dropped or involved in a crash, with or without obvious signs of damage.



DO NOT cover up the charger while it is charging. The charger air cools and needs to be on a hard, flat surface in an open space. Use the charger with the indicator light facing upward. DO NOT use it when the charger is inverted, which can inhibit cooling and reduce charger lifespan.



You should not open the battery housing as doing so will void the warranty and can cause serious injury or death to you or others.

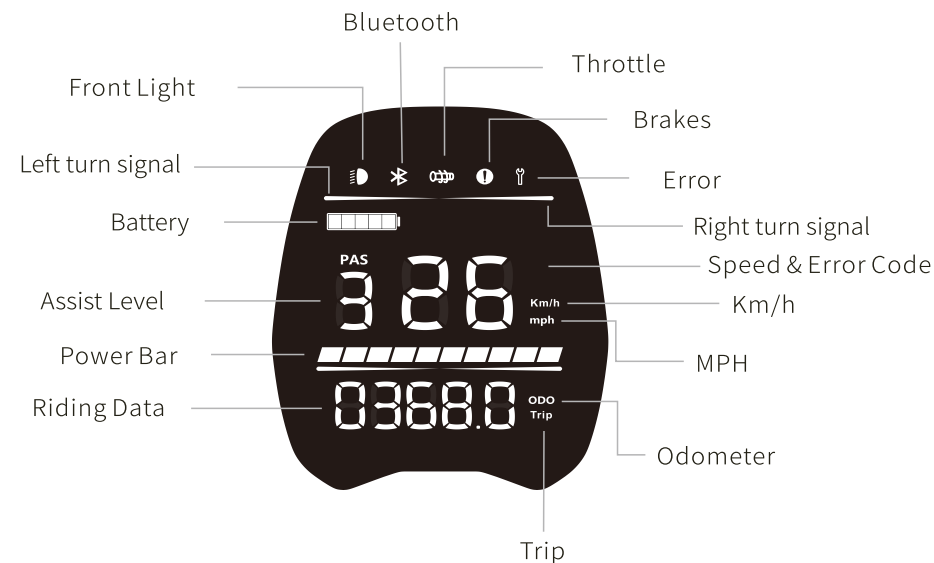QUICK START GUIDE

GETTING STARTED

When power on your ebike, it's on PAS 0, you can shift it between PAS1 to PAS5 by pressing the "+" or "-". The throttle and pedal assist will only work when the ebike is at PAS1 ~PAS5. All of TST GRP LLC ebikes have four working modes.

- 1,throttle only mode: you can ride the with pure electric assist;
- 2, pedal assist mode, you can easily pedal the ebike and get the power assist from the motor, use the display & button to adjust the assist level from 0-5 to meet your needs;
- 3, normal Ebike mode, Set the assist level to 0 and pedal like a normal Ebike;
- 4, walking mode, Press and hold the minus button for three seconds to enter "walking mode", the ebike will travel at 4.83-6.44 km/h (3-4 MPH) without pushing by man power, making it easy to be moved on challenging terrains (e.g. narrow trails and very steep hills).

Our R002/R002 PLUS can reach a maximum speed of 28 mph.

BATTERY AND CHARGING

For best results, charge the battery off the Ebike indoors in a moderately warm environment. Plug the charger into the charging port and then connect the charger to a wall outlet to charge the battery. While charging, the LED indicator light will be solid red. When charging is complete, the LED indicator light will turn solid green.

MAINTENANCE AND SERVICE

Your R002/R002 PLUS Ebike will operate smoothly and last longer if you maintain it properly. Watch the "HOW TO ASSEMBLE" video we prepared for you before you assemble your Ebike. If you have questions during the assembly process, please contact link <https://www.tstebike.com/pages/contact>.

SAFETY

Wear an approved ebikes helmet whenever you ride a ebikes, regardless of whether it is required by law. When riding the R002/R002 PLUS Ebike, you should adhere to all local laws.

OPERATION INSTRUCTION

NOTICE: Please do not perform any steps in the Operation section of this manual until you have thoroughly read this manual, as the following sections contain important safety information.



The first time you operate the Ebike, read and understand every section of this manual. The manual contains important safety information that must be followed to avoid dangerous situations, accidents, property damage, injury, or even death.



Users must follow the instructions and warnings contained in this manual for safety. Please do not attempt to operate your Ebike from TST GRP LLC Bikes until you have adequate knowledge and understanding of its control and operation. Failure to follow instructions can result in serious injury or death and is not covered by warranty. Contact TST GRP LLC if you have any questions about assembly or operation.



Before operating, users must become accustomed to the Ebike's power control system. The pedal assistance feature is also a powerful feature, and users should fully research and understand how to use it before using it for the first time. The failure to familiarize yourself with and practice the operation of the power system on your TST GRP LLC Ebike can result in damage, injury, or death.

DRIVINGRANGE

TST GRP LLC Bikes' range is how far the Ebike can travel on a single charge of the onboard battery. In this manual, range values are based on expected usage characteristics of TST GRP LLC Bikes. Range is affected by many factors, including elevation, speed, payload, acceleration, number of starts and stops, ambient air temperature, tire pressure, and terrain.

When you first get an Ebike from TST GRP LLC Bikes, we suggest that you select the lowest level of assistance in order to familiarize yourself with your Ebike and travel route. After you become familiar with the range requirements of your travel routes and the capabilities of your Ebike, you can then adjust your riding characteristics. The following table provides general range estimates based on a variety of factors. This table is meant to help owners to understand the factors that can contribute to decreased range, but TST GRP LLC Bikes makes no claims to the range that individual users might experience in a particular use case.

Parking, Storage, and Transport

To ensure your Ebike is well cared for on and off the road, please follow these tips for parking, storing, and transporting it.

- When pushing or carrying the Ebike manually, turn off the power to avoid accidental acceleration.
- Turn the power and any lights off to conserve battery.
- Ensure the battery is locked to the frame in the off position or use the key to remove the battery and store it in a temperature-controlled location for safety.
- Park indoors when possible. You should park your ebike in a dry location as soon as possible if you have to park outdoors in rain or wet conditions. An ebike used in wet conditions requires more frequent maintenance to prevent rust, corrosion, and to make sure all systems are functioning properly.
- TST GRP LLC Bikes ebikes must be parked in public places in accordance with local regulations and rules.
- It is recommended that you lock up your Ebike to ensure that it is secure and reduce the likelihood of theft. We do not make any claims or recommendations about the proper lock hardware or procedures for securing your Ebike, but we do recommend you take appropriate precautions to prevent theft of your Ebike.
- TST GRP LLC Bikes cannot be parked, stored, or transported on a vehicle rack that is not designed for the Ebike's weight and size.
- Rack your ebikes on a vehicle that is compatible with the width of your tires. Some racks may not accommodate all wire widths.
- When carrying your Ebike on a vehicle rack for transportation, unlock and remove the battery. This will reduce the weight of the Ebike, make lifting and loading easier, and allow you to transport the battery in the cab of the vehicle.
- Do not transport TST GRP LLC Bikes on a vehicle rack during rain, as this can cause water damage to the electrical components.

USER MAINTENANCE AND SERVICE INSTRUCTIONS

Basic Ebike Care

TST GRP LLC Bikes recommends that if you lack the skills, experience, or tools to perform maintenance and adjustments on your Ebike, you have a certified, reputable Ebike mechanic perform these tasks.

Recommended Service Intervals

To ensure TST GRP LLC Bikes function as intended, and to reduce wear and tear on their systems, regular inspections and maintenance are vital. Below are the recommended service intervals. Real world wear and tear, and the need for service, will vary with conditions of use. Inspections, service, and necessary replacements are generally recommended at the interval indicated in the table below.

Interval	Inspect	Service	Replace
Weekly, 160-321 km (100-200 mi)	- Check hardware for proper torque. - Check the drivetrain for proper alignment and function (including the chain, freewheel, chainring, and derailleur). - Check wheel trueness and for quiet wheel operation (without spoke noise). - Check if the brakes are functional. - Check the condition of the frame for any damage.	- Clean the frame by wiping the frame down with a damp cloth. - Use barrel adjuster(s) to tension derailleur/brake cables if needed. - Adjust the hydraulic brake cable	- Replace any components found to be damaged beyond repair or broken by TST GRP LLC Bikes Product Support or a certified, reputable Ebike mechanic.
Monthly, 402-1207 km (250-750 mi)	- Check brake pad alignment, brake cable tension . - Check the Ebike is shifting properly, proper derailleur cable tension. - Check chain stretch. - Check brake and shifter cables for corrosion or fraying. - Check spoke tension. - Check accessory mounting (rack mounting bolts, fender hardware, and alignment).	- Clean and lubricate the drivetrain. - Check crankset and pedal torque. - Clean brake and shift cables. - True and tension wheels if any loose spokes are discovered.	- Replace brake and shift cables if necessary. - Replace brake pads if necessary.
Every 6 Months, 1207-2011 km (750-1250 mi)	- Inspect drivetrain (chain, chainring, freewheel, and derailleur). - Inspect all cables and housings .	- Standard tune-up by a certified, reputable Ebike mechanic is recommended. - Grease bottom bracket.	- Replace brake pads. - Replace tires if necessary. - Replace cables and housings if necessary.

Pre-Ride Safety Checklist

Notice: Before every ride, and after every 25-45 miles (40-72 km), we advise following the pre-ride safety checklist.

Safety Check	Basic Steps
1. Brakes	Ensure front and rear brakes work properly. Inspect brake pads for wear and make sure they are not overworn. Position the brake pads correctly in relation to the rims. Make sure brake cables are lubricated, adjusted correctly, and do not show obvious wear. Ensure brake levers are lubricated and tightly secured to the handlebar. Test that the brake levers are firm and that the brake motor cut off functions and the brake light are functioning properly.
2. Wheels and Tires	Ensure tires are inflated within the recommended limits posted on the tire sidewalls and hold air. Make sure tires are in good condition, have no bulges or excessive wear, and are not damaged in any other way. Verify the rims are true and have no obvious wobbles, dents, or kinks. Ensure all wheel spokes are tight and not broken. Check axle nuts and front wheel quick release to ensure they are tight. Make sure the locking lever on the quick release skewer is properly tensioned, closed, and secured.
3. Steering	Ensure that the handlebars and stem are properly adjusted, tightened, and allowed to steer. Test the stem clamp bolt security by twisting the handlebars. Ensure the handlebar is set correctly in relation to the fork and the direction of travel.
4. Chain	Ensure the chain is clean, oiled, and runs smoothly. Extra care is required in wet, salty/otherwise corrosive, or dusty conditions.
5. Bearings	Ensure all bearings are lubricated, run freely, and display no excess movement, grinding, or rattling. Check headset, wheel bearings, pedal bearings, and bottom bracket bearings.
6. Cranks and Pedals	Ensure pedals are securely tightened to the cranks. Ensure the cranks are securely tightened and are not bent.
7. Derailleur and Brake Cables	Check that the derailleur is adjusted and functioning properly. Ensure shifter and brake levers are attached to the handlebar securely. Ensure all shifter cables are properly lubricated.
8. Frame, Fork, and Seat	Check that the frame and fork are not bent or broken. If either frame or fork are bent or broken, they are secured and undamaged. Check that the seat is adjusted properly, and the seatpost quick release lever is securely tightened.

9. Motor Drive Assembly and Throttle	Ensure the hub motor is spinning smoothly and the motor bearings are in good working order. Ensure that all power cables running to the hub motor are securely attached and undamaged. Ensure the hub motor axle bolts are secure and that the torque arm, torque arm bolt, and torque washers are in place.
10. Battery	Ensure the battery is charged before use. Ensure there is no damage to the battery. Lock battery to frame and ensure that it is secured. Charge and store Ebike and battery in a dry location, between 32 °F - 86°F (0°C-30°C). Let the Ebike dry completely before using it again.
11. Electrical Cables	Make sure that connectors are fully seated and free of debris or moisture. Check cables and cable housing for obvious signs of damage. Make sure the headlights, taillights, and brake lights are working, adjusted properly, and not obstructed.
12. Accessories	Ensure all reflectors are properly fitted and not obscured. Ensure all other fittings on the Ebike are secured and functional. Inspect the helmet and other safety gear for signs of damage. Make sure the rider is wearing a helmet and other required safety gear. Ensure mounting hardware is properly secured if equipped with a front rack, rear rack, basket, etc. When fitted with a rear rack, ensure the tail light and power wire are properly secured. Ensure the fender mounting hardware is properly secured if fitted with fenders. Ensure there are no cracks or holes in fenders. If installed, ensure the optional rear wheel lock is secured in the unlocked position and the key is removed before every ride.



Within the first 50-100miles (80-160km) of use, your cables, spokes, and chain will stretch, and the bolted connection will loosen. Always have a certified, reputable Ebike mechanic perform a tune-up on your R002/R002 PLUS after your initial break-in period of 50-100mi (80-160km) (depending on riding conditions such as total weight, riding characteristics, and terrain). The regular inspections and tune-ups of your Ebike are particularly important to ensure that it remains safe and fun to ride.

Tire Information

R002/R002 PLUS uses 20" x 4" rubber tires with inner tubes. Tires are designed for durability and safety for regular cycling activities. The inflation and condition of the tires should be checked before each use. Proper inflation, care, and timely replacement will help to maintain your Ebike's operating characteristics, and prevent unsafe conditions.

On R002/R002 PLUS, TST GRP LLC Bikes recommends MAX 20 PSI for the stock tires. Always stay within the manufacturer's recommended air pressure range as listed on the tire sidewall.



It is critically important that proper air pressure is always maintained in pneumatic tires. Never underinflate or over inflate the tires. Low pressure may result in loss of control, while overinflated tires may explode. Failure to always maintain the air pressure rating indicated on pneumatic tires may result in tire and/or wheel failure.



Use a pressure gauge to inflate your tires from a regulated air source. Unregulated air sources could overinflate your tires, resulting in a burst tire. Even tires equipped with built-in flat-preventative tire liners, like those that come with ebikes by TST GRP LLC Bikes, can and do get flats from punctures, pinches, impact, and other causes. In the event of tire wear or a flat tire, you must replace the tires and/or tubes before operating your Ebike or you risk injury to riders and/or damage to your Ebike.



Make sure that all air pressure has been removed from the inner tube before removing the tire from the rim when changing a tire or tube. Failure to remove all air pressure from the inner tube could result in serious injury.



The use of aftermarket tires or inner tubes, not provided by TST GRP LLC Bikes, may void your warranty, create an unsafe riding condition, or damage your Ebike. Replace aftermarket tires with sufficient reflective sidewall striping, if required by law.

Deraillleur

Right next to the rear brake, on the right side of the handle bar, is our front deraillleur with 7-1 gears. You can change your riding experience by pressing the deraillleur to make the chain to different gears.

TROUBLESHOOTING

	Symptoms	Possible Causes	Most Common Solutions
1	The Ebike does not work	1. Insufficient battery power 2. Faulty connections 3. Battery not fully seated in tray 4. Improper turn on sequence 5. Brakes are applied	1. Charge the battery 2. Clean and repair connectors 3. Install battery correctly 4. Turn on Ebike with proper sequence 5. Disengage brakes
2	Irregular acceleration and/or reduced top speed	1. Insufficient battery power 2. Loose or damaged throttle 3. Misaligned or damaged magnet ring	1. Charge or replace battery 2. Replace throttle 3. Align or replace magnet ring
3	The motor does not respond when the Ebike is powered on	1. Loose wiring 2. Loose or damaged throttle 3. Loose or damaged motor plug wire 4. Damaged motor	1. Repair and or reconnect 2. Tighten or replace 3. Secure or replace 4. Repair or replace
4	Reduced range	1. Low tire pressure 2. Low or faulty battery 3. Driving with too many hills, headwind, braking, and/or excessive load 4. Battery discharged for a long period of time without regular charges, aged, damaged. 5. Brakes rubbing	1. Adjust tire pressure 2. Check connections or charge battery 3. Assist with pedals or adjust route 4. Contact Product Support if range decline persists. 5. Adjust the brakes
5	The battery will not charge	1. Charger not well connected 2. Charger damaged 3. Battery damaged 4. Wiring damaged	1. Adjust the connections 2. Replace 3. Replace 4. Repair or replace
6	Wheel or motor makes strange noises	1. Loose or damaged wheel spokes or rim 2. Loose or damaged motor wiring	1. Tighten, repair, or replace 2. Reconnect or replace the motor.

Error Detection

An error detection system is integrated into the display and controller of your Ebike from TST GRP LLC. An error code will appear if the electronic control system fails. These error codes are the most common and can help in troubleshooting. It is recommended that you stop operating your Ebike immediately when it displays an error code and contact TST GRP LLC Bikes.

Error Code	Definition
E0	Throttle Fault
E1	Torque Sensor Fault
E2	Controller Meter Communication Fault
E3	Low Voltage Protection
E4	Controller High Temperature
E5	Motor Hall Fault
E6	Motor Stalling
E7	Controller Over Current Protection
E8	Motor High Temperature Protection
E9	Battery Over Voltage Protection

Additional Information on Wear

As compared to ebikes without power assistance, R002/R002 PLUS components are subject to higher wear. This is because R002/R002 PLUS can travel at higher speeds and has a greater weight than regular bicycles. Higher wear is not a defect in the product and is not covered by the warranty. Components commonly affected are tires, brake pads, rotors, spokes, wheels, and batteries.



When a component's useful life has expired, it can lose its function unexpectedly. This can cause serious injury or even death. Therefore, pay attention to characteristics such as cracks, scratches, and changes in the color or operation of components that could indicate their useful life has ended. Replace worn components immediately. An experienced, reputable Ebike mechanic should be consulted if you are unfamiliar with regular maintenance.

LIMITED WARRANTY

Warranty and other binding legal terms (e.g., terms of purchase, etc.) for your Ebike are subject to change at any time. You can view your terms of purchase and current warranty at <https://www.tstebike.com/pages/help-center>.

Warranty Info

All TST GRP LLC ebikes, and their individual covered components (as defined herein), are protected against all manufacturing defects in material or workmanship for one (1) years(core components) after the date of a qualifying purchase (the "Warranty Period"). This Limited Warranty is only applicable to United States ebike purchases and in accordance with the following terms:

The Limited Warranty is only valid for the original owner of an ebike purchased from TST GRP LLC online or in person. A Limited Warranty begins upon your receipt of the ebike and will terminate at the earliest of the end of the Warranty Period or the sale or transfer of the ebike to another person. Additional owners or transferees of the ebike will not be covered under this Limited Warranty.

The Limited Warranty covers the replacement of the following items but with different time span: motor, battery, torque sensor, charger, LCD screen, switch, front light, frame, front fork, handlebar, crank, throttle, pedal, flywheel, thumb shifter, rear derailleur, brake disc, tire (each a "covered component").

Please check the details at <https://www.tstebike.com/pages/help-center>.

During the Warranty Period, the Covered Components are warranted to be free from defects in materials and/or workmanship.

This Limited Warranty Does Not Cover:

- The normal wear and tear of any Covered Component.
- Consumables or normal wear and tear parts (including without limitation tires, tubes, brake pads, cables and housing, grips, chain and spokes).
- Damage to Covered Components resulting from failure to follow instructions in the ebike owner's manual, acts of God, accident, misuse, negligence, abuse, commercial use, alterations, modifications, improper assembly, installation of parts or accessories not originally intended or compatible with the ebike as sold, operator error, water damage, extreme riding, stunt riding, or improper follow-up maintenance.
- Without a doubt, TST GRP LLC will not be liable or responsible for any damage, failure, or loss caused by any unauthorized service or use of unauthorized parts.
- The Battery is not warranted against damage caused by power surges, improper chargers, improper maintenance or other such misuse, normal wear or water damage.
- Determining whether damage or defect to an ebike or covered component is protected by this limited warranty shall be in the sole discretion of TST GRP LLC.

Shipping Damage:

Damage to a covered components during shipping is not covered by this Limited Warranty, but TST GRP LLC will replace such damaged covered components if you:

- Notify TST GRP LLC of a covered components damaged in the shipping process within fifteen (15) days of your receipt of the ebike;
- Provide TST GRP LLC with a dated picture of the damaged covered components;
- Take note of any immediately recognizable damage on the shipper's Bill of Lading prior to signing off on the shipment.

Shipping damage claims are very time-sensitive, and you must inspect your ebike for damage as soon as you receive it.

If you choose to set up your own independent shipping method, such as use of a freight forwarder or other similar service, TST GRP LLC will not replace any Covered Components damaged during such shipping method.

Credit Card Chargebacks:

If any ebike purchase becomes subject to a credit card charge back in any amount, and you are still in possession of the ebike, then this Limited Warranty shall be invalidated until the credit card charge back has been resolved.

Claims Process:

TST GRP LLC will not replace covered components under this limited warranty without first seeing photos or video of the damaged components.

In order to exercise your right to receive a replacement for a Covered Component under this Limited Warranty, you must:

- Contact the TST GRP LLC Product Support team by visiting <https://www.tstebike.com/pages/contact> .
- Initially, the Product Support team will identify simple solutions for the issue with your ebike.
- When the Product Support team determines that a Covered Component needs to be replaced, they will provide you with instructions on how to return the defective Covered Component and receive a replacement.
- After you receive the replacement Covered Component, the Product Support team will assist you in replacing or installing the new Covered Component into your ebike.
- The shipping costs associated with returning a Covered Component will be your responsibility, unless TST GRP LLC agrees to pay them in writing. Replacement Covered Components under this Limited Warranty shall only be shipped to the address of the original purchaser.

The remedies described above are your sole and exclusive remedies and TST GRP LLC's entire liability for any breach of this limited warranty. TST GRP LLC's liability shall under no circumstances exceed the actual amount paid by you for the ebike, nor shall TST GRP LLC under any circumstances be liable for any consequential, incidental, special or punitive damages or losses, whether direct or indirect.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This limited warranty gives you specific legal rights and you may also have other rights, which vary from state to state.

To the extent permissible under applicable law, TST GRP LLC disclaims all implied warranties, including without limitation the warranties of merchantability and fitness for a particular purpose for the duration of this express limited warranty.

Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

We are here to help!

Contact us directly by visiting <https://www.tstebike.com/pages/contact>